

Evaluation of a Four Stroke Compression-Ignition Engine with Load (100n).

Idogwu S²., Onah T. O¹ and Ugwuanyi B²

¹Department of Mechanical and Production Engineering, Enugu State University of Science and Technology Enugu, Nigeria.

²Department of Biomedical Engineering, Federal School of Dental and Therapy, Enugu, Nigeria.

Email: Okechukwutm@yahoo.com

ABSTRACT

A loaded four stroke compression ignition (Nissan Primera model) engine mounted in a heat engine laboratory of Enugu State University of Science and Technology Enugu was used for the exercise. An absorption dynamometer was attached to the engine to measure torque. As the engine was running, the speed was recorded with a digital tachometer at a time frame of 20 seconds. A lot of tests were carried out to determine a number of parameters like specific fuel consumption, mechanical efficiency, fuel mass flow rate, indicated power, brake power, brake horse power, rate of fuel consumption at different gear ratios. The data so obtained were tabulated and relationship between various parameters plotted in graphs. Results show that: volume of diesel consumed increases with increasing engine speed, increases with increasing gear; mass flow rate of diesel increases with increasing brake power, increases with increasing gear; specific fuel consumption decreases with increasing engine speed ; specific fuel consumption also decreases with increasing brake power; indicated power increases as engine speed increases.

Keywords: Diesel Engine, Absorption Dynamometer, Tachometer, Engine Torque, Brake Horse Power

INTRODUCTION

The compression-ignition engine is an internal combustion engine designed to convert the chemical energy available in fuel into mechanical energy. This mechanical energy moves pistons up and down inside cylinders [1].

The two basic mechanical designs of this engine are 2 - stroke and 4 - stroke, which are used to achieve the operational sequence of intake, compression, combustion and exhaust strokes [2]. In a four stroke combustion cycle of compression-ignition engine, air is drawn into the cylinder on the first stroke, compressed on the second stroke, fuel is injected and ignited on the third stroke and the products of combustion are exhausted on the fourth stroke [3].

Compression-ignition engine usually has longer stroke length chiefly to facilitate achieving the necessary compression ratios, but also to reduce the optimal operating speed [4]. The engine has the

highest thermal efficiency of any standard internal or external combustion engine due to its very high compression ratio and inherent lean burn which enables heat dissipation by the excess air [5].

The internal combustion engine is used to power nearly all land vehicles and many water- based and air - based vehicles as well [6].

Basic Parameters Used To Express The Performance of A Four Stroke Diesel Engine.

Power: The main purpose of running an engine is to obtain mechanical power. Power is defined as the rate of doing work and is equal to the product of force and linear velocity or the product of torque and angular velocity.

Brake Power (BP): The power developed by an engine and measured at the output shaft is called the brake power and is expressed by [7] as:

$$BP = \frac{2\pi N r W}{60} \dots\dots\dots(1)$$

Indica Indicated Power (IP): It is defined as the power developed by combustion of fuel in the cylinder of engine [8] as:

$$IP = \frac{PLANW}{60} \dots\dots\dots(2)$$

Mechanical efficiency (η_m): This is defined as the ratio of brake power to indicated power and is expressed by [9] as:

$$\eta_m = \frac{BP}{IP} \dots\dots\dots(3)$$

Specific fuel consumption (SFC): It is the quantity of fuel consumed to produce one unit of power in one unit of time and is expressed by [10] as:

$$SFC = \frac{mf}{BP} \dots\dots\dots(4)$$

Volume flow rate (Q): This is the amount of fuel consumed in specific time and is expressed by [1] as:

$$Q = \frac{v}{t} \dots\dots\dots(5)$$

Fuel Mass Flow Rate (mf): Fuel mass flow rate in kg/h is expressed by [5] as:

$$mf = Q \times s.g. \times density\ of\ water(1000) \times 3600 \dots\dots\dots(6)$$

Where: Q is volume flow rate
s.g. is specific gravity of diesel
=0.81

MATERIALS AND METHODS

Laser Tachometer: This is a digital device used to measure the speed and rotation of an engine shaft.

Absorption Dynamometer: The absorption dynamometer used in the laboratory was positioned at a known distance 0.30m to the gear box. Based on the force recorded in the load cell and known distance, a torque can be calculated. This torque is recorded along with the angular velocity of the crankshaft (engine speed) and together they define power.

Engine: The engine tested in the laboratory is a four stroke diesel engine (Nissan primera model). The specifications and published performance data are listed below.

- Engine type.....turbocharged diesel
- Cylinder area.....0.001785m²
- Bore.....0.0885m
- Stroke.....0.088m
- Compression ratio.....22.3:1
- Shaft radius.....0.005m
- Number of cylinder.....4

Gas flow meter: This measures the volumetric flow rate of a fluid.

Burette and stopwatch: These are used to measure the gas flow rate into the engine.

Methods of Experimentation

Fuel consumption tests:

The quantity of fuel consumed by the engine on a test bed is easily carried out by using fuel measuring device like burette.

The burette filled with diesel was connected to the injector with a hose. The engine was started and the initial level of diesel in the burette was recorded immediately and timing started. The throttle control of the engine was gradually increased while placing the tachometer at the output of engine shaft till it (tachometer) displayed the required speed. Also the final level of diesel was recorded when the stopwatch reached the required time (20 seconds). The volume of diesel consumed was the difference in reading between the initial and final values.

Determination of brake power at varying gear and speed:

The engine was loaded with a load measured with a spring balance. Then it was started at a known gear and speed, and the initial level of diesel in the burette was recorded immediately and timing started. Also the final level of diesel was recorded when the stopwatch reached the required time (20 seconds). Mathematically,

$$\text{Brake Power (BP)} = \frac{2\pi N r W}{60}$$

Where: N is engine speed (rpm)

r is shaft radius = 0.005m
W is Load = 100N



Fig 1. Picture of the test bed set-up

RESULTS AND DISCUSSIONS

Actual speed values obtained ---700,
900, 1100 and 1300 rpm
Stroke length,L-----0.088m
Area of cylinder,A.....0.001785m²
Fuel used -----diesel
Specific gravity of diesel ----- 0.81

Radius of rotating shaft,r -----0.005m
(measured with vernier caliper)
Number of cylinder -----4
Mean effective pressure,P --- 101.325kpa
Load, W.....100N

Results of the various tests are recorded on table 1.

Table 1. Results of test at load 100N

Gear	Load, W(N)	Speed, N(rpm)	Time, t (sec.)	Volume of gas consumed, V _{f(ml)}
1	100	700	20	8.20
		900		8.90
		1100		9.45
		1300		9.80
2	100	700	20	11.90
		900		12.15
		1100		12.60
		1300		13.00
3	100	700	20	14.00
		900		15.10
		1100		16.25
		1300		16.90
4	100	700	20	17.00
		900		19.00
		1100		20.10
		1300		21.50

Table 2. The results of engine parameters obtained at gear 1

s/n	Parameters	symbol	Unit	Trial 1	Trial 2	Trial 3	Trial 4
1	Time	t	Sec	20	20	20	20
2	Speed	N	Rpm	700	900	1100	1300
3	Volume of gas consumed	v_g	ml	8.20	8.90	9.45	9.80
4	Mass flow rate of gas	mf	Kg/h	1.1956	1.296	1.3792	1.4292
5	Brake horse power	BHP	Kw	0.901	1.159	1.416	1.674
6	Brake power	BP	Kw	36.651	47.123	57.595	68.067
7	Indicated power	IP	Kw	18.568	23.874	29.199	34.484
8	Specific fuel consumption	SFC	Kg/kwh	0.0326	0.0275	0.0239	0.0210
9	Mechanical efficiency	η_m	%	1.97	1.97	1.97	1.97
10	Torque	T	N-m	0.5	0.5	0.5	0.5
11	Volume flow rate	Q	m^3/s	4.1×10^{-7}	4.45×10^{-7}	4.73×10^{-7}	4.9×10^{-7}

Table 3. The results of engine parameters obtained at gear 2

s/n	Parameters	symbol	unit	Trial 1	Trial 2	Trial 3	Trial 4
1	Time	t	Sec	20	20	20	20
2	Speed	N	rpm	700	900	1100	1300
3	Volume of gas consumed	v_g	ml	11.90	12.15	12.60	13.00
4	Mass flow rate of gas	mf	Kg/h	1.735	1.7729	1.8371	1.8954
5	Brake horse power	BHP	Kw	0.901	1.159	1.416	1.674
6	Brake power	BP	Kw	36.651	47.123	57.595	68.067
7	Indicated power	IP	Kw	18.568	23.874	29.199	34.484
8	Specific fuel consumption	SFC	Kg/kwh	0.0473	0.0376	0.0319	0.0278
9	Mechanical efficiency	η_m	%	1.97	1.97	1.97	1.97
10	Torque	T	N-m	0.5	0.5	0.5	0.5
11	Volume flow rate	Q	m^3/s	5.95×10^{-7}	6.08×10^{-7}	6.3×10^{-7}	6.5×10^{-7}

Table 4. The results of engine parameters obtained at gear 3

s/n	Parameters	symbol	unit	Trial 1	Trial 2	Trial 3	Trial 4
1	Time	t	Sec	20	20	20	20
2	Speed	N	rpm	700	900	1100	1300
3	Volume of gas consumed	v_g	ml	14.00	15.10	16.25	16.90
4	Mass flow rate of gas	mf	Kg/h	2.0412	2.2016	2.3693	2.464
5	Brake horse power	BHP	Kw	0.901	1.159	1.416	1.674
6	Brake power	BP	Kw	36.651	47.123	57.595	68.067
7	Indicated power	IP	Kw	18.568	23.874	29.199	34.484
8	Specific fuel consumption	SFC	Kg/kwh	0.0557	0.0467	0.0411	0.0362
9	Mechanical efficiency	η_m	%	1.97	1.97	1.97	1.97
10	Torque	T	N-m	0.5	0.5	0.5	0.5
11	Volume flow rate	Q	m^3/s	7×10^{-7}	7.55×10^{-7}	8.125×10^{-7}	8.45×10^{-7}

Table 5. The results of engine parameters obtained at gear 4

s/n	Parameters	symbol	unit	Trial 1	Trial 2	Trial 3	Trial 4
1	Time	t	Sec	20	20	20	20
2	Speed	N	rpm	700	900	1100	1300
3	Volume of gas consumed	v_g	ml	17.00	19.00	20.10	21.00
4	Gas mass flow rate	mf	Kg/h	2.4786	2.7702	2.9306	3.0618
5	Brake horse power	BHP	Kw	0.901	1.159	1.416	1.674
6	Brake power	BP	Kw	36.651	47.123	57.595	68.067
7	Indicated power	IP	Kw	18.568	23.874	29.199	34.484
8	Specific fuel consumption	SFC	Kg/kwh	0.0676	0.0588	0.0509	0.0450
9	Mechanical efficiency	η_m	%	1.97	1.97	1.97	1.97
10	Torque	T	N-m	0.5	0.5	0.5	0.5
11	Volume flow rate	Q	m^3/s	8.5×10^{-7}	9.5×10^{-7}	10.05×10^{-7}	10.5×10^{-7}

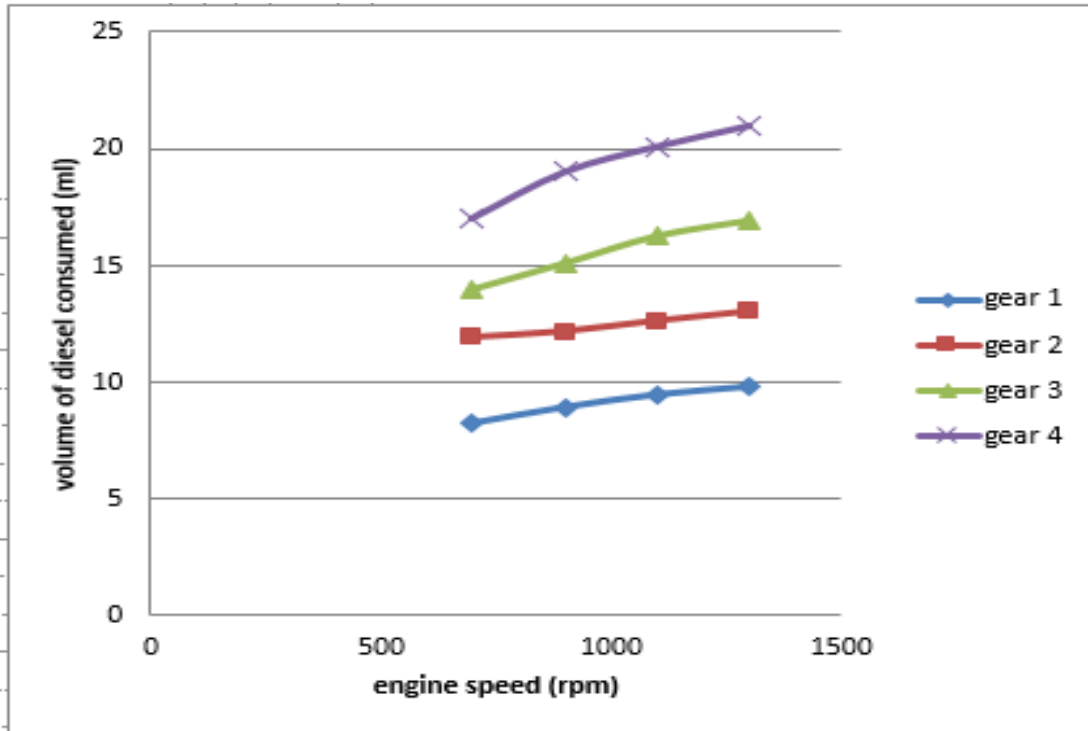


Fig.2. volume of diesel consumed versus engine speed

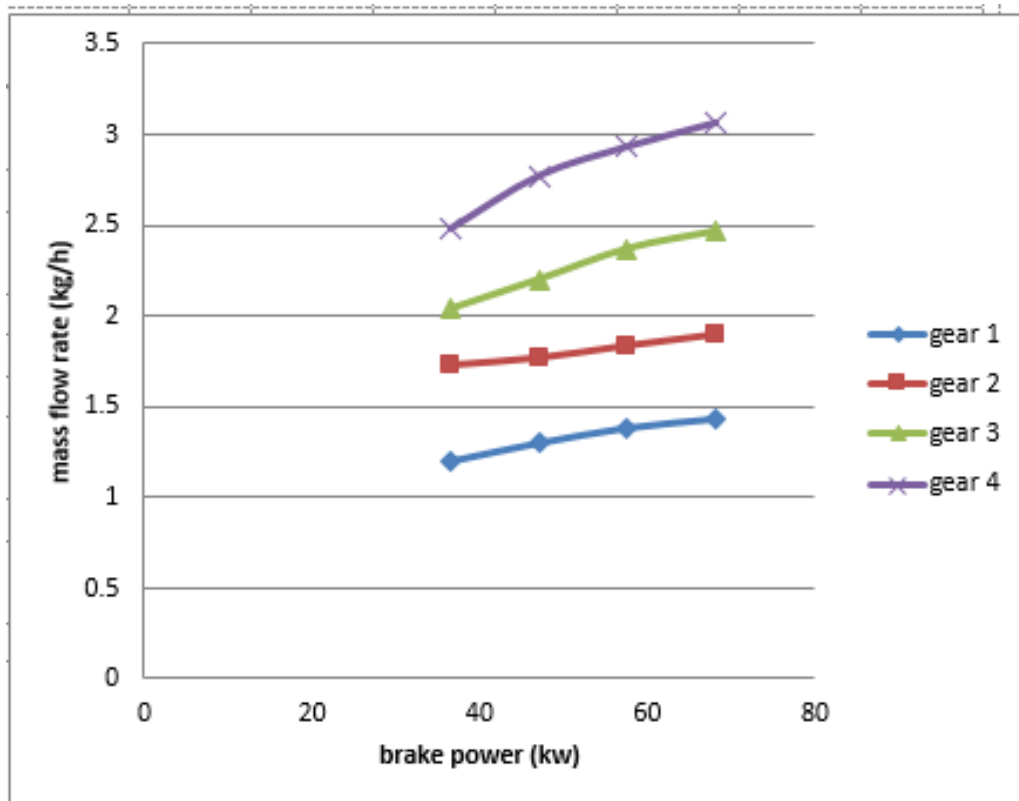


Fig 3. Mass flow rate versus brake power

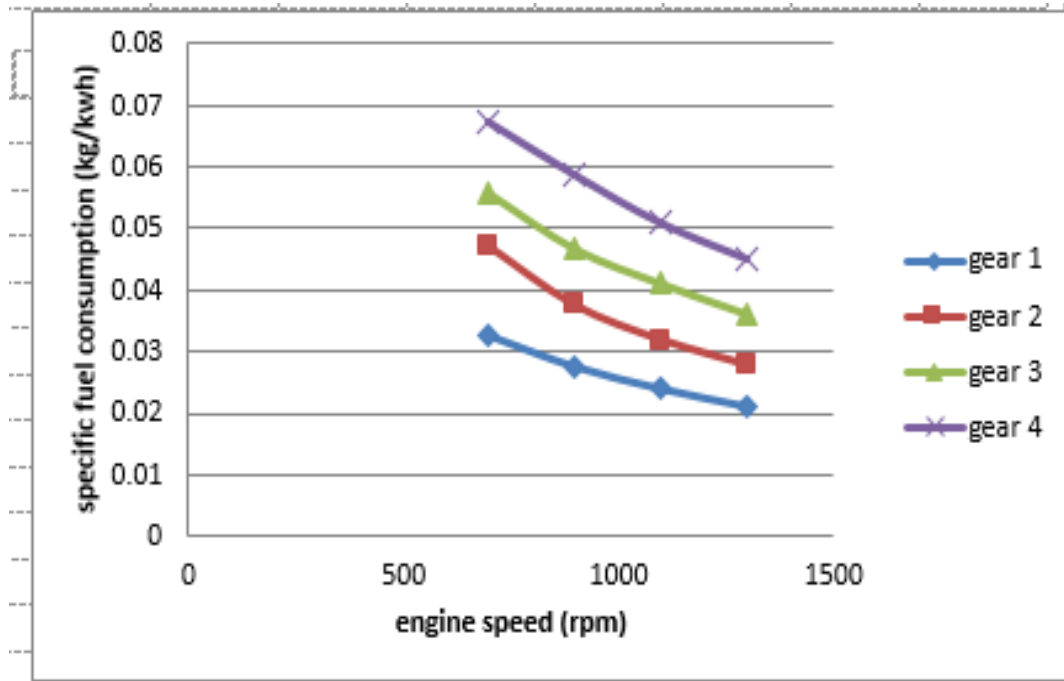


Fig 4 specific fuel consumption versus engine speed

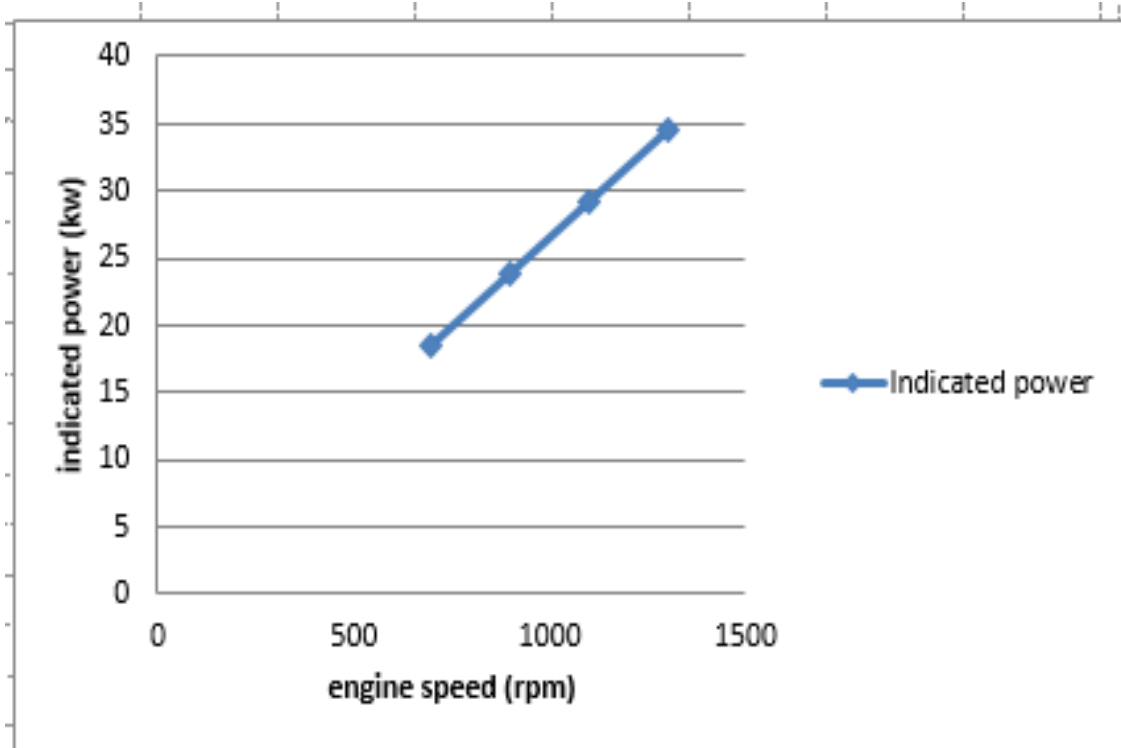


Fig 5. Indicated power versus engine speed

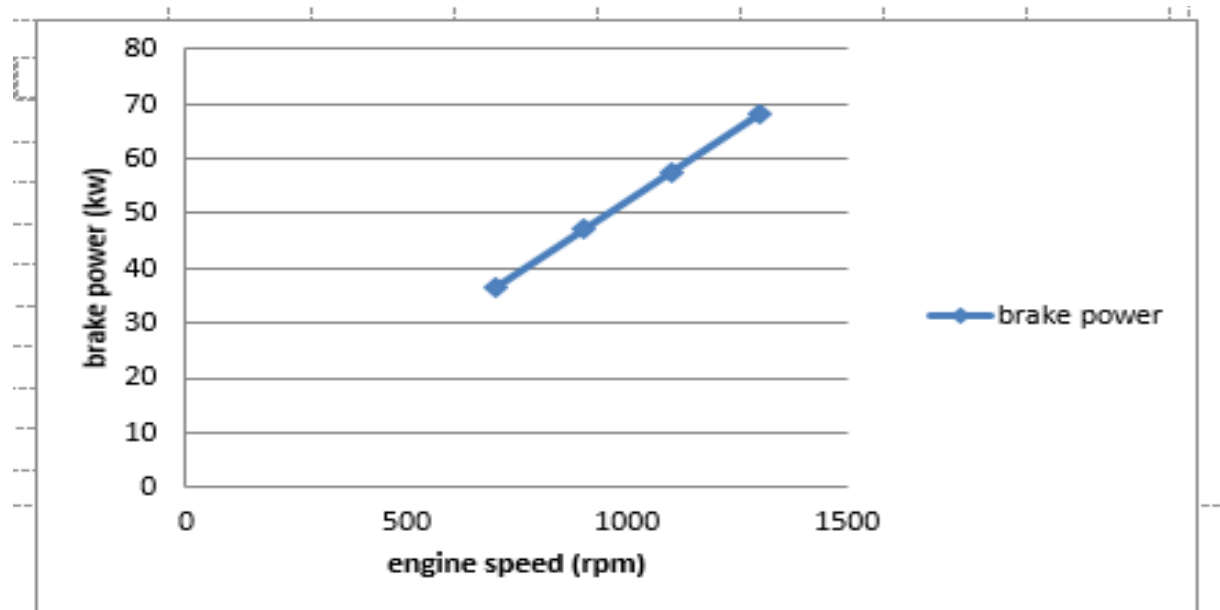


Fig 6. Brake power versus engine speed

CONCLUSION

Volume of gas consumed increases with increasing engine speed, increases with increasing gear. Volume flow rate increases with increasing brake power, increases with increasing gear. Fuel mass flow rate increases with increasing brake

power, increases with increasing gear. Specific fuel consumption decreases with increasing brake power. Specific fuel consumption decreases with increasing engine speed. Indicated power increases as engine speed increases

REFERENCES

1. Allan Bonnick, Dere Newborn, (2011): A Practical Approach To Motor Vehicle Engineering and Maintenance, 3rd edition, Elsevier Ltd the boulevard Langford lane, Oxford.
2. Baumgarter, B. and Carsten, T (2006): Mixture Formation in Internal Combustion Engines, Springer, Berlin.
3. Dolan, J.A (1976): Motor Vehicle Technology and Practical, Work Art 1 and 2, London.
4. Eastop, T.D and McConkey, A (2006): Applied Thermodynamics for Engineering Technologist, 5th edition, Dorling Kinders ew Delhi. PP 345.
5. Ganeshan, V (2008): Internal Combustion Engine, 3rd edition, McGraw Hill New York.
6. Heywood, J.B (1998): Internal combustion Engine Fundamentals, McGraw Hill, Singapore.
7. Hillier, V.A.W and Patrck, F (1988): Fundamentals of Motor Vehicle Technology, 3rd Edition, Hutchinson Publishers. Khurmi, R. K. and Gupta, J.K (2000): A Textbook of Thermal Engineering, Chands and Co. Ltd., Ram Nagar, New Delhi.
8. Nag, P.K (2001): Power Plant Engineering, 2nd Edition, Tata McGraw Hill Publishing, New Delhi.
9. Onkar, Singh, (2008): Applied Thermodynamics, 3rd edition, New Age International Publishers India.
10. Rai, G.D (2006): An Introduction to Power Plant Technology, 3rd edition, Khana Publishers New Delhi.